

Godwin NC100S Dri-Prime® Pump



The Godwin NC100S Dri-Prime pump is designed for use in municipal wastewater applications that contain stringy, modern waste. This unique self-cleaning, non-clog pump is recommended for sewer, lift station, and bypass applications, and is ideal for permanent installations where reliability is absolutely critical, e.g. Diesel Backup Systems (DBS).

The NC100S is a member of the Godwin S Series of Smart pumps, which feature greater fuel economy, easier operation, and reduced maintenance. Field Smart Technology (FST) is standard on every S series pump, providing real-time remote monitoring and control.

Specifications

Suction connection	4 in (100 mm) flange
Delivery connection	4 in (100 mm) flange
Max capacity	1,065 USGPM † (242 m ³ /hr)
Max impeller diameter	10.0 in
Max operating temp	176 °F * (80 °C)
Max working pressure	68 psi (4.7 bar)
Max suction pressure	58 psi (4.0 bar)
Max casing pressure	103 psi (7.1 bar)
Max operating speed	2200 rpm

* Please contact our office for applications in excess of 176°F (80 °C).

† Larger diameter pipes may be required for maximum flows.


Features and benefits

- Flygt 'non-clog' N-Technology to avoid ragging and downtime caused by modern waste.
- Field Smart Technology (FST) allows the user to monitor & control the pump from anywhere in the world.
- New compressor belt tensioner reduces time to change and adjust belt to approximately 30 minutes.
- New sight glass and measuring stick added to monitor level and quality of mechanical seal oil.
- Improved hydraulic design reduces vibration, maximizes efficiency and fuel economy.
- Fully automatic priming from dry to 28 feet (8.5 meters).
- Venturi priming requires no adjustment or control.
- Available as open set or Sound Attenuated Enclosure.
- Standard build engine 3TNV88F (EPA Final Tier 4).
- Other engine options available.
- Optional environmentally friendly skid base contains all fluid spills.

Godwin NC100S Dri-Prime® Pump

Performance curve

Pump curve is based on 0 ft dynamic suction lift.

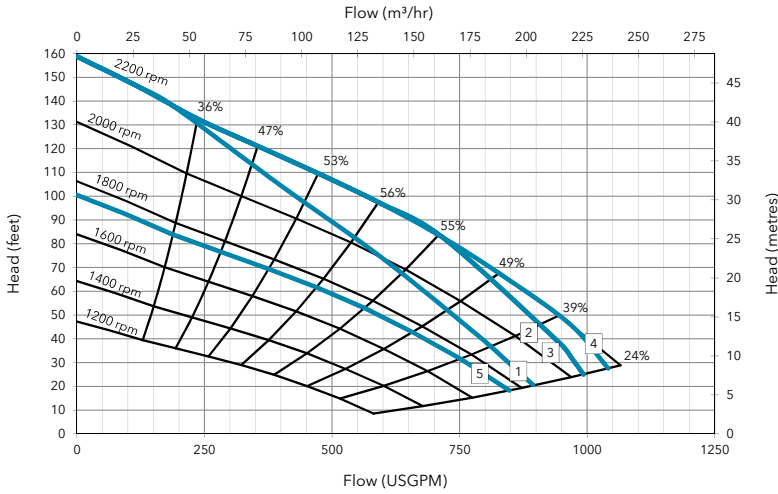

Suction lift table 1800 rpm

Performance data provided in tables is based on water tests at sea level and 68°F ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

Total suction Head (feet)	Total Delivery Head (feet)				
	13	26	39	52	66
	Output (USGPM)				
10	623	541	459	394	295
15	591	509	427	344	230
20	558	492	394	312	197
25	525	459	361	262	115

Open trailer

Fuel capacity 30 US Gal (114 Liters)

Weight dry 1,930 lb (875 kg)

Weight wet 2,150 lb (975 kg)

Dimensions L 102 in x W 54 in x H 70 in

(L 2,591 mm x W 1,372 mm x H 1,778 mm)

Information provided above is based on the Yanmar 3TNV88F.

Sound attenuated enclosure

Noise @ 23 ft (7 m) 67 db(A)

Fuel capacity 80 US Gal (303 Liters)

Weight dry 2,670 lb (1,211 kg)

Weight wet 3,250 lb (1,474 kg)

Dimensions L 82 in x W 47 in x H 65 in

(L 2,083 mm x W 1,194 mm x H 1,651 mm)

Information provided above is based on the Yanmar 3TNV88F.

Materials

Pump casing	Cast Iron BS EN 1561/EN-JL1030
Wearplates	Front - Hard Iron EN12513:2000 Rear - Cast Iron BS1561:1997
Pump shaft	Carbon steel BS970:1991 817M40T
Impeller	Hard Iron BS EN 12513:2000
Mechanical seal faces	Silicon carbide Vs Silicon carbide

Driver

Power Energy Use Emissions 1800 RPM Rating

1	Yanmar 3TNV88F	24 HP	1.0 US Gal/hr	EPA FT4
2	Yanmar 3TNV88C	35 HP	1.2 US Gal/hr	EPA FT4
3	Yanmar 3TNV88BDSA	36 HP	1.2 US Gal/hr	EPA iT4
4	Caterpillar C1.5T	40 HP	1.5 US Gal/hr	EPA iT4
5	Electric motor	25 HP	29.5 A	

Please contact the factory or office for further details. A typical picture of the pump is shown. All information is approximate and for general guidance only. Consult the factory for other driver options.

Specifications and illustrations are subject to revision without notice. Xylem makes no representation regarding the completeness or accuracy of this information and is not liable for any direct or indirect damages arising from or relating to this information or its use.